

# L'avancée technologique...

## SERIE 300 / 300 RANGE.

PROJECTEURS DE THEATRE P.C. & FRESNEL.

*PLANO CONVEX & FRESNEL THEATRE SPOTLIGHTS.*

1000 - 1200 - 2000 - 2500W HALOGENE / TUNGSTEN.



"LUTIN"

306 LPC + CF 500\*

(\* Accessoire en option / Accessory on option.

Puissance / Power :	1000W 230/240V	1000/1200W 230/240V	1000/1200W 230/240V	2000/2500W 230/240V	2000/2500W 230/240V
Douille / Socket :	GX9,5	GX9,5	G22	G22	G22
Lentille / Lens :	Ø150	Ø200	Ø200	Ø200	Ø250
Plan convexe / Clear plano convex :	306 LPC	310 HPC	310 THPC	329 HPC	/
Pebble convexe / Pebble convex :	306 LPB	310 HPB	310 THPB	329 HPB	/
Fresnel :	306 LF	310 HF	310 THF	329 HF	325 HF

Lentilles Plan convexes, Pebble convexes et Fresnel de même diamètre interchangeables (excepté 325F) /  
N.B. Plano convex, Pebble convex and Fresnel lenses are interchangeable (except 325F).

Route de Beaumont F 60530 Fresnoy - en - Thelle. tél.: 33 (0)3.44.26.51.89 fax: 33 (0)3.44.26.90.79 - www.robertjuliat.fr  
Robert Juliat USA, 48 Capital Drive, Wallingford, CT 06492 phone.: (203) 294 0481 fax: (203) 294 0482 - www.robertjuliatamerica.com

# La lumière, l'art de l'ombre.



"LUTIN"  
306L



310H



329H




325H

**PHOTOMETRIE / LIGHT OUTPUT.**

REF. + LAMPE / LAMP.					
306L	CP70 - 1000W GX9,5	LPC	10°	66°	370
		LPB	11°	63°	800
310	CP70 - 1000W GX9,5	HPC	8°	63°	520
		HPB	8°	63°	830
	CP90 - 1200W GX9,5	HPC	8°	63°	580
		HPB	8°	63°	850
329	CP92 - 2000W G22	HPC	16°	72°	1000
		HPB	9°	68°	1500
	CP91 - 2500W G22	HPC	16°	72°	1200
		HPB	9°	68°	1900

REF. + LAMPE / LAMP.					
306LHF	CP70 - 1000W GX9,5		6°		1050
310 HF	CP70 - 1000W GX9,5		6°	42°	220
	CP90 - 1200W GX9,5		6°	46°	250
329 HF	CP92 - 2000W G22		7°	49°	350
	CP91 - 2500W G22		7°	49°	440
325 HF	CP92 - 2000W G22		7°	49°	420
	CP91 - 2500W G22		7°	49°	540







Mesures effectuées à la tension indiquée sur la lampe, et avec grillage de protection /  
 Measurements: lamp voltage, spotlight fitted with safety grid frame.



**Version "L" : 306**


**QUELQUES DETAILS / SOME DETAILS.**

**Version "H" : 310 - 329 - 325**




Voir documentation "LUTIN" / See "LUTIN" documentation.

**DIMENSIONS & POIDS / SIZE & WEIGHT.**

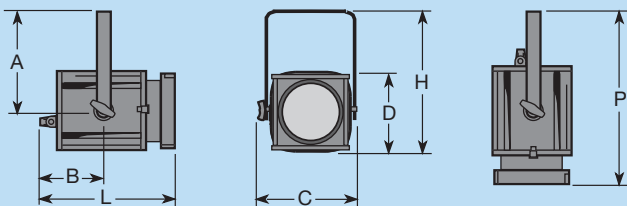


REF.	L	A	B	C	D	H	P			
306L	435	290	250	300	210	385	470	7,2	8,5	0,05
310	465	315	210	350	250	440	520	9	11,5	0,08
329	470	350	280	410	320	520	530	14	16	0,09
325F	430	310	230	480	340	480	500	14	16	0,13


**ACCESSOIRES / ACCESSORIES.**



Porte filtre carton.  
Cardboard filter holder.



Porte filtre métal.  
Metal filter holder.



Coupe flux rotatif.  
Rotating barndoor.

REF.	Porte filtre carton / Cardboard filter holder	Porte filtre métal / Metal filter holder	Coupe flux rotatif / Rotating barndoor
306	180 x 180mm.	180 x 180mm.	180 x 180mm.
310	215 x 215mm.	215 x 215mm.	215 x 215mm.
329	/	245 x 245mm.	245 x 245mm.
325	/	333 x 333mm.	333 x 333mm.

Appareils conformes aux directives européennes de normalisation: NF EN 60598-1: 2002 / NF EN 60598-2-17: 1991 / A2: 1992.

All units comply with the new European regulations: NF EN 60598-1: 1993 / NF EN 60598-2-17: 1991 / A2: 1992.