

NDPG

NDP series

Network Dimmer with RCBO



The **network dimmer pack NDPG** is designed to fulfill all the top requirements of the most demanding lighting applications e.g. **theatres**, live concerts and also permanent installations. Unit was especially created for users requiring maximum flexibility, top class features and superb network connections.

Unit is controlled by a high speed processor with smooth **16-bit dimming** resolution via specially designed zero-crossing circuit. This technology guarantees trouble-free operation and high proof against the influence of negative surroundings with top class **rise-time of 400us**.

Moreover, the **network dimmer pack NDP12** comes with **NDP-DC+RELAY** feature that is a **DC DRIVE/RELAY switch with rating of 16A and possibility to turn on/off via curve**. (DC-RELAY is not available for NDP dimmers 25 and 32A).

Every output features its own **combination of MCB and RCD 30mA (Type A)**.


All NDPseries dimming units are covered by a 5-year warranty.

Main voltage: **3x230V / 400V / 40-65Hz**

Main current: **3x20 up to 3x63A**

Protection: **RCBO = Combined RCD 30mA + MCB**

- **DCdrive/pulse** driving of triacs
- **RELAY/DIMMER** on single channel - depends on curve
- **Theater** or touring application
- **Rise-time of 400us**
- **Main switch** per unit
- **RCBO** on each channel
- Double **DMX input + RDM support**
- **Ethernet connection / Art-Net / SRS.net / sACN**
- Software patch of **Manual / DMX A / DMX B / Ethernet**
- **Preheat** for all or a separate channel
- **Free monitoring software**
- **100% duty cycle**

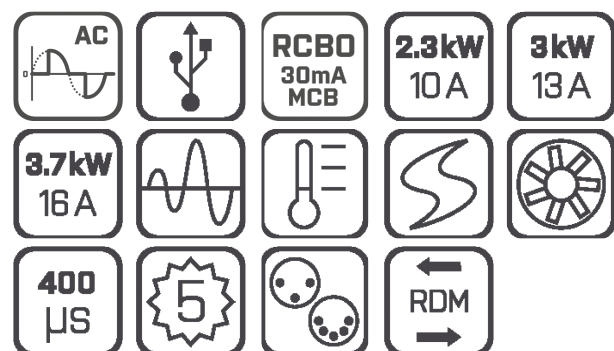

Dimensions: **483 x 132 x 460mm (WxHxD)**

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o

Variants

12-channel version

- 932042 NDPG1210B-5 12x10A / 2.3kW, RCBO C10A 30mA
- 932060 NDPG1213B-5 12x13A / 3kW, RCBO C13A 30mA
- 932061 NDPG1216B-5 12x16A / 3.7kW, RCBO C16A 30mA

6-channel version

- 932043 NDPG6010B-5 6x10A / 2.3kW, RCBO C10A 30mA
- 932062 NDPG6013B-5 6x13A / 3kW, RCBO C13A 30mA
- 932063 NDPG6016B-5 6x16A / 3.7kW, RCBO C16A 30mA

DMX connector



3-pin XLR



5-pin XLR

DDP/NDP output



K0: 6x PG21



K1: 1x HARTING 24 (PH:1-12, N:13-24)



K2: 2x HARTING 16 (PH:1-6, N:9-14, NC:7+8+15+16)



K3: 2x Socapex 19



K4: 12x French Schuko



K5: 12x Schuko



K7: 12x Danish socket



K8: 12x Swiss Socket Type23



K9: 4x HARTING 16 (PH:1-6, N:9-14, NC:7+8+15+16)



K10: 2x HARTING 16 (PH:1,3,..., N:2,4,..., NC:13-16)



K11: 2x HARTING 6



K12: 2x HARTING 6 (PH, N - in round)



K13: 12x CEE16/3p



K14: 6x CEE32/3p

3PH-IN connector



32A 5-pin



63A 5-pin

3PH-IN cable options



Excluding power cable



1,5m regular cable, open end



2,0m cable, open end



Extra charge for 0.5m power cable 5G6



Extra charge for 0.5m power cable 5G10

SRS Group s.r.o reserves the right to make changes to the equipment described in this manual/datasheet without prior notice. (E&OE). © SRS Group s.r.o