


ACCESSORIES FOR SA312/315



Flexible wall mounting frame
Bearing 40KG




Φ3 steel wire
The wire is 3mm diameter, 1M long with wire ear and wire jacket, bearing 60KG




Handbag(customized)




Coupling bar
Bearing 50KG



Three-foot stand
Bearing 80KG







Flightcase
For 2 cabinets,
with 100mm wheels




Rain bag(customized)

INSTALLATIONS

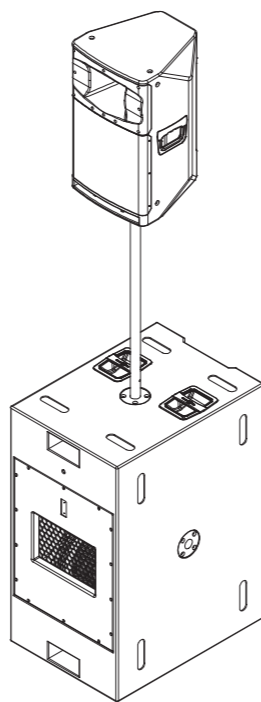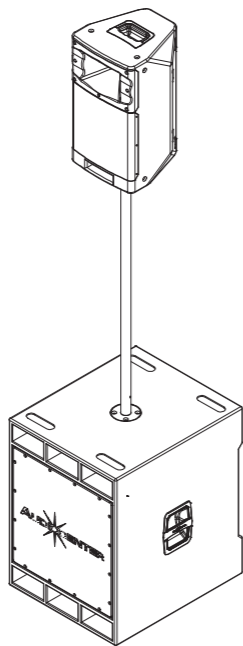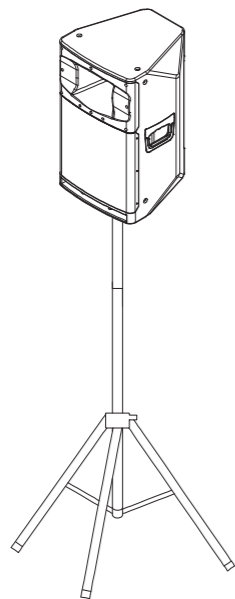

SA3118

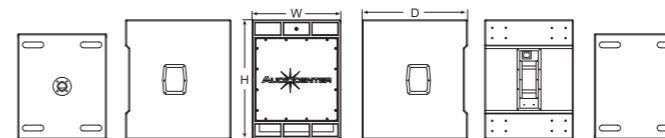


Dimension(W×H×D): 520×700×618mm

PRODUCT PROFILE


3 low-pass filters (80Hz, 100Hz, 120Hz) in SA3118 are available to choose according to different venues and music styles. There is also phase switch. All connectors and function buttons are on the back panel.

SA3118 subwoofer is with 1-way XLR for input and output. Signals can be sent to different speakers for sound distribution.

ACCESSORIES FOR SA3118




Flightcase
For 1 cabinet,
with 100mm wheels



Rain bag
(customized)



Wheel



Dolly
(customized)

SPECIFICATION

Type	Active DSP-controlled Compact Subwoofer
Frequency Response (-6dB anechoic chamber)	35Hz-150Hz
Maximum Calculated SPL/1M	134dB
LF Driver	Customized Audiocenter ferrite driver, 4"voice coil
AMPLIFIER	
Amplifier Circuitry	Class D
Power (Peak)	2000W
Frequency Response (1W 8Ω 2ch)	20Hz-6KHz(±0.5dB)
Intermodulation Distortion	<0.05%
Total Harmonic Distortion	<0.05%
Protection	DC protection, short circuit protection, overheat protection, input overload protection, output overload protection, soft startup protection, overvoltage protection, undervoltage protection
Cooling System	Cooling with fans, air convection
DSP	
Processor	96KHz signal sampling frequency, 24bit precision
Presets	80Hz, 100Hz, 120Hz
Crossover	Controlled by DSP
Output/Input	
Signal Input	1×NEUTRIK® female XLR
Signal Output	1×NEUTRIK® male XLR
Power Input	3 pin plug
Working Voltage	100V-130V/60Hz or 220V-240V/50Hz
Cabinet	
Cabinet Material	CNC made of excellent wood
Cabinet Color	Black is standard and default color. Consult with Audiocenter sales team for other customized colors
Pole Mount	M20 base Φ35mm
Dimension (W×H×D)	520×700×618mm
Net Weight	43.0Kg

SUGGESTED APPLICATION



Multi-functional meeting room



Museum



DJ



Wedding

SYSTEM CONFIGURATION

- SA3 full range loudspeaker or the same type of full range loudspeaker